



SERIA CS

- NOŻYCE DO CIĘCIA STALI
- MARILYN SHEAR

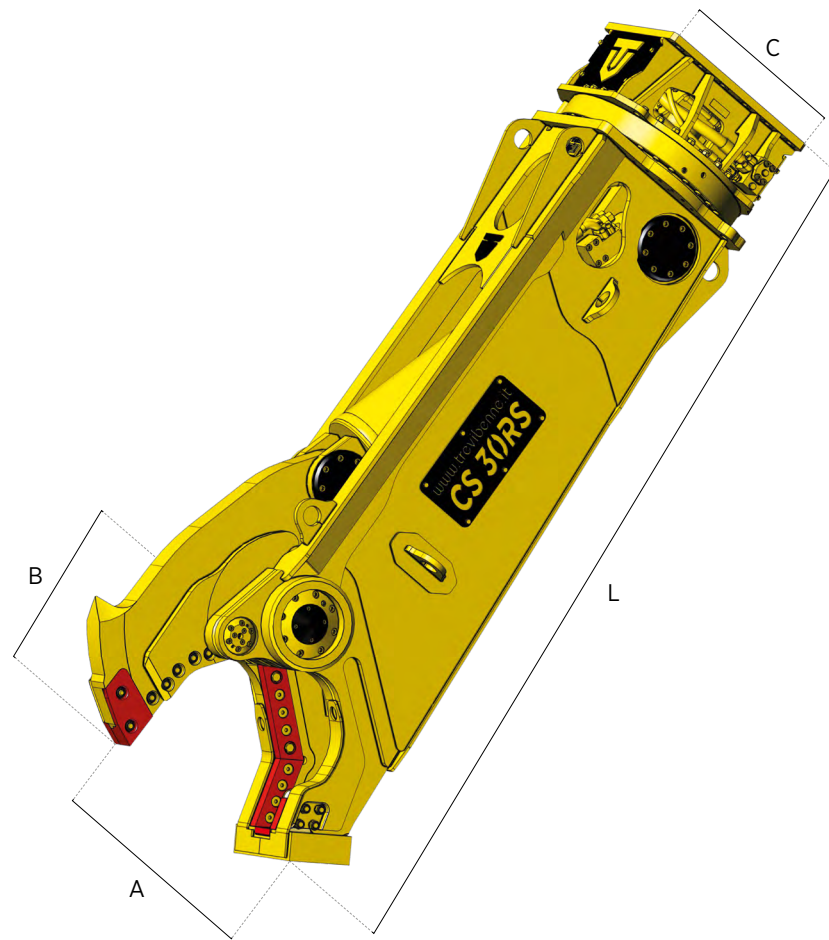

model	(2) (1) (2)	ton
CS 03R	1,5 3,5	2 3
CS 05R	2,5 4,5	3 4
CS 07RS	3,5 8	4 7
CS 12RS	6 12	7 10
CS 20RS	9 18	10 16
CS 25RS	15 22	16 20
CS 30	19 27	20 25
CS 40RS	24 32	25 30
CS 50RS	29 38	30 35

model	(2) (1) (2)	ton
CS 55RS	33 43	35 40
CS 70RS	43 68	45 65
CS 100RS	60 100	70 90
CS 140RS	85 120	90 110
CS 160RS	100 150	110 140
CS 180RS	110 160	120 150
CS 200RS	140 220	160 200

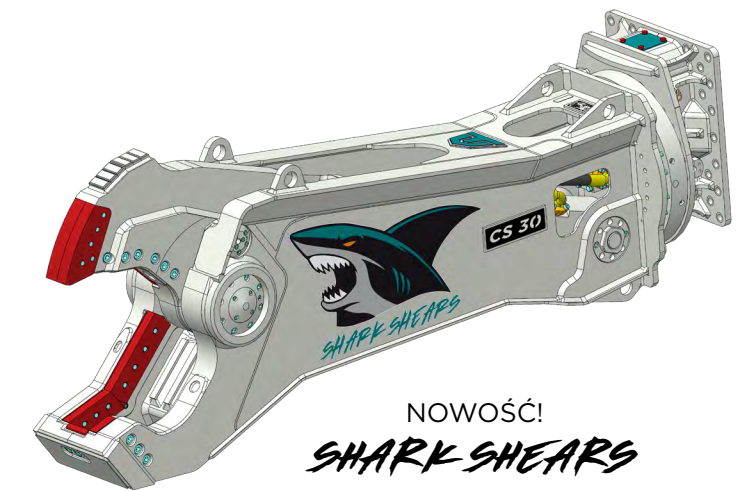

NOWOŚĆ!
SHARK SHEARS

(1) Optymalna kombinacja koparka - osprzęt
(1) Optimum excavator-equipment combination

(2) Możliwa kombinacja koparka - osprzęt
(2) Possible excavator-equipment combination

NEW
Produkt



	CS 03R	CS 05R	CS 07RS	CS 12RS	CS 20RS	CS 25RS	CS 30	CS 40RS	CS 50RS
	kg.	315	485	915	1160	2020	2620	3150	4760
	kg.	245	375	665	910	1620	2220	2740	4170
A	mm.	265	335	400	465	530	595	620	725
B	mm.	235	285	375	380	475	520	560	675
L	mm.	1380	1710	2165	2300	2730	2950	3040	3660
	bar	280	320	320	350	350	350	350	350
	l/min.	80 / 100	80 / 150	100 / 150	150 / 250	180 / 250	200 / 300	200 / 300	300 / 400
	bar	120	140	140	140	140	140	140	140
	l/min.	2	3	12 / 25*	12 / 25**	20 / 40**	20 / 40**	20**	20 / 40**
		/	/	/	/	/	/	/	/

* Waga nożyc bez układu obrotowego / ** Model weight without rotation
** Podwójny silnik / ** Double motor

	CS 55RS	CS 70RS	CS 100RS	CS 140RS	CS 160RS	CS 180RS	CS 200RS
	kg.	6250	8000	10600	14200	16700	23700
		5310	6600	8500	12100	14100	20000
A	mm.	795	840	925	1080	1100	1200
B	mm.	730	770	810	975	1030	1150
L	mm.	3965	4170	4430	5140	5440	6050
	bar	350	350	350	350	350	350
	l/min.	400 / 500	450 / 600	500 / 800	500 / 800	800 / 1000	800 / 1000
	bar	140	140	140	140	250	250
	l/min.	20 / 40**	70**	80**	80**	60**	70**
		✓	✓	✓	✓	✓	✓

* Waga nożyc bez układu obrotowego / ** Model weight without rotation
** Podwójny silnik / ** Double motor

