



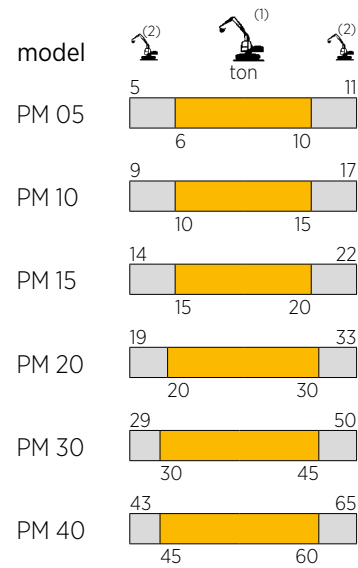

SERIA PM

- CHWYTAKI DO KAMIENI
- HANDLING GRAB

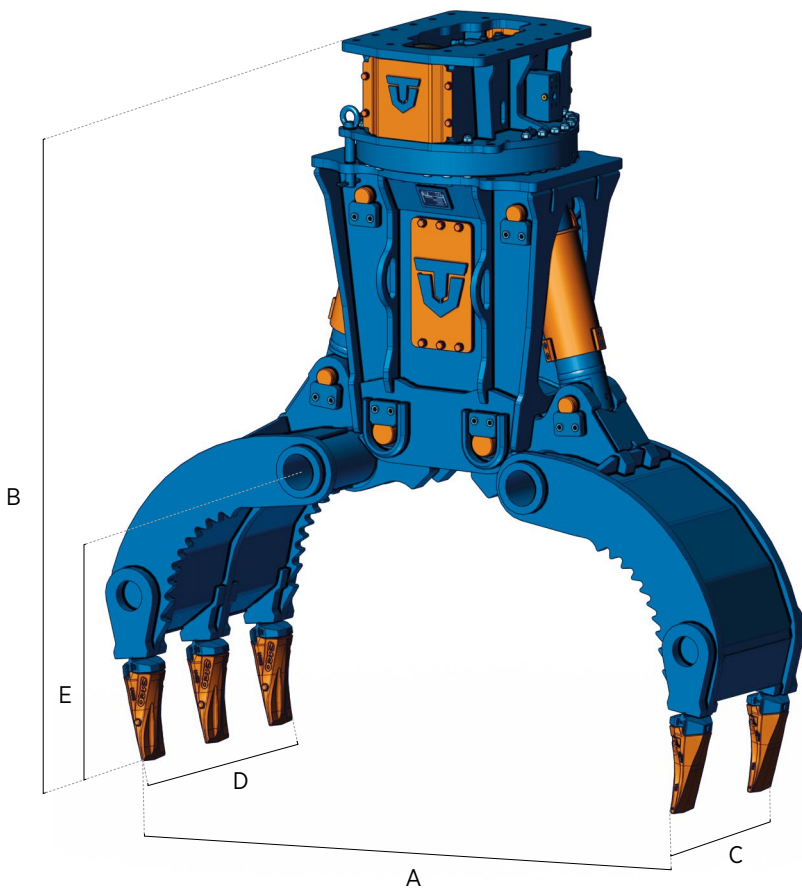

(1) Optymalna kombinacja koparka - osprzęt
Optimum excavator - equipment combination

(2) Możliwa kombinacja koparka - osprzęt
Possible excavator - equipment combination



NEW PRODUCT

		PM 05	PM 10	PM 15	PM 20	PM 30	PM 40
	kg.	500	930	1330	2230	3660	5070
A	mm.	900	1285	1650	1925	2200	2570
B	mm.	1435	1770	2020	2400	2750	3070
C	mm.	350	410	480	555	670	790
D	mm.	540	650	750	845	1100	1320
E	mm.	550	670	765	890	1120	1270
Cap. SAE	m ³	0,4	0,5	0,6	0,9	1	1,2
	bar	320	320	350	350	350	350
	l/min.	80 / 100	100 / 120	120 / 200	180 / 250	200 / 300	250 / 350
	bar	140	140	140	140	140	140
	l/min.	3	25*	25*	40*	40*	40*



HARDOX
WEAR PLATE

HARDOX
IN MY BODY

*Podwójny silnik / *Double motor